

Hose replacement - 2610A/2680/2680A


1. Remove the 3 screws closer to the nozzle (leave the other 3 screws alone).



2. Detach the nozzle but do not pull it free yet - the solution tube is still attached!



3. Remove the solution tube clip using pliers.

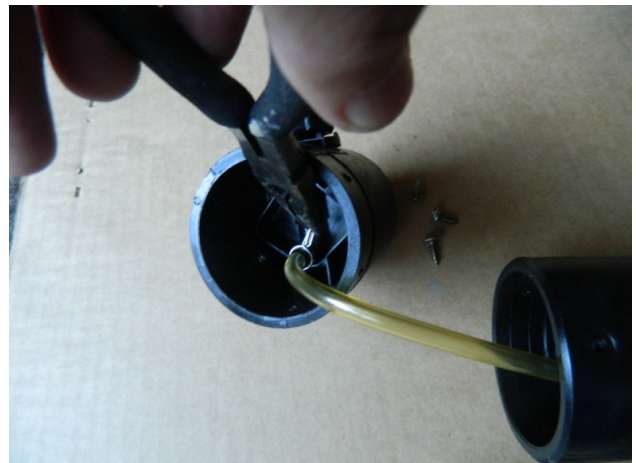

4. Pull the solution tube free from the nozzle.



5. Remove the 3 screws closer to the machine body (leave the other 3 screws alone).



6. Remove the old hose.
7. To install a new hose, follow the above procedure in reverse order.

Make sure to firmly re-attach and re-clip the solution tube to the nozzle.